


# S30 Surveyor

## Leak Noise Amplification System

ENVIRONMENTAL MONITORING  
PRESSURE CONTROL  
LEAK DETECTION  
DATA LOGGING  
FLOW MEASUREMENT

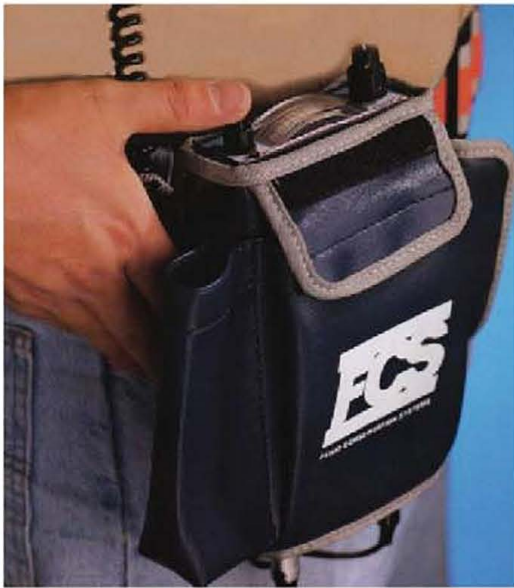

### KEY BENEFITS

**Adjustable Analog Meter** - Allows for easy comparisons of noise level at neighboring access points. Sensitivity can be adjusted for improved results in areas with high noise levels.

**Manual Volume Control** - Provides full control over volume levels to enhance listening.

**Meter backlight** - Allows for enhanced viewing at night.

**Aviator-Quality Headphones** - Provides for optimum sound quality, ensuring that the maximum number of leaks are heard.


**Lightweight Console** - Comfortable to use for several hours at a time.

**Push Button On/Off** - Allows for easy operation with gloves on.

**Custom Suitcase with Belt** - Protects equipment for easy carrying.

**Backed by FCS** - Full one year on parts and labor. The resources of our sales, repair and training departments are available for the life of the S30.

A leaking pipe produces a distinct noise that travels along the pipe, through the water and sometimes to the surface. An operator using the S30 can listen at various contact points (valves, hydrants etc) to determine whether or not the pipe is leaking. To do this, the operator places the AX80 sensor in contact with any access point in the distribution system. When the S30 is turned on, the console amplifies the sound so that the user can hear the noise through the supplied aviator quality headphones. The analog meter gives an indication of the noise intensity in the pipe and, by listening at several points in a given area, an operator can localize the general location of a leak.

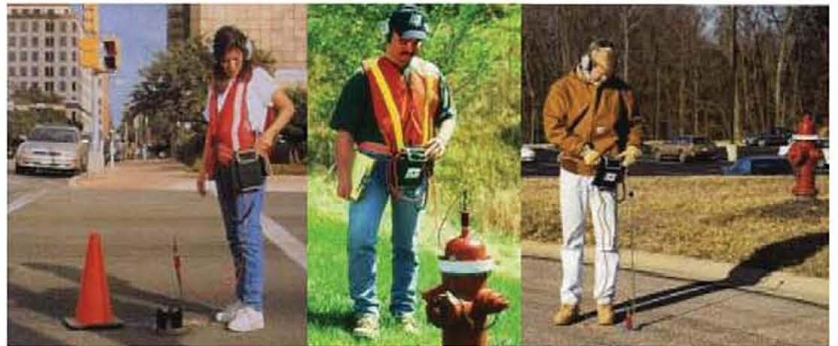

Downtown leak survey on main line valve

Residential Leak survey

Leak pinpointing by surface sounding

The S30 can also be used in a similar way to a ground microphone. By attaching the surface sounding plate to the AX80, the user can run the AX80 along the ground above the pipe. By using the S30 to locate the spot where the noise is loudest, the operator can pinpoint the location of the leak



For More Information Call: 877.585.5325  
Or visit our website: [www.leakdetectionservice.com](http://www.leakdetectionservice.com)

A HALMA COMPANY

# S30 Surveyor

## Leak Noise Amplification System

ENVIRONMENTAL MONITORING


PRESSURE CONTROL

LEAK DETECTION

DATA LOGGING

FLOW MEASUREMENT

Dimensions	Width 4" Depth 1.5" Length 7.5"
Weight	1.8 lbs
Gain Control	Manual
Power Supply	2 - 9V batteries
Meter	Analog w/backlight
Accelerometer Sensitivity	12 V/G
Frequency Response	30 Hz to 5 kHz (-3dB)
Warranty	1 year parts and labor

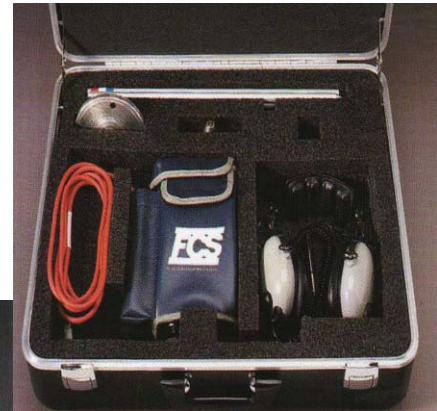

- 1 - S30 amplifier console & belt case
- 2 - Aviator quality stereo headphones
- 3 - AX80 sensor assembly & cable
- 4 - Surface sounding plate
- 5 - Sectional steel probe red set
- 6 - Fiberglass storage case



*FCS reserves the right to change the specification of any product without prior notice.*

Utility Services Associates, LLC  
916 W. Center St  
Kalispell, MT 59901  
877-585-5325  
[www.leakdetectionservice.com](http://www.leakdetectionservice.com)